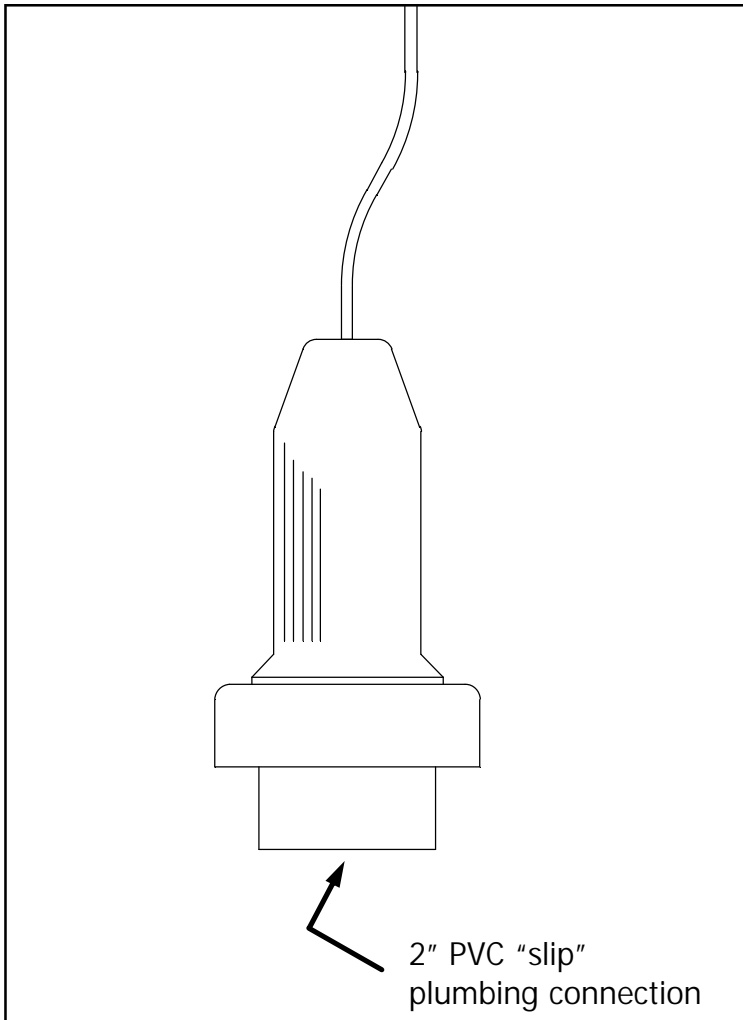

SUBMERGIBLE SENSOR

FOR FLANGE OR PRESSURE CONNECTION



MODEL SLX 110

FEATURES

- Choice of outputs:
 - 0.5 - 4.5 VDC
 - 4-20 mA DC
 - Intrinsic Safety
- Choice of sensors:
 - 5, 15, 30, 75 PSI
- Submersible to 100+ feet
- Large 2.5" Teflon diaphragm
- Sealed breather system

APPLICATIONS

Waterproof protection of a sensor for:

- Flange mounting
- Direct pressure connection

CONTEGRA's Model SLX 110 submersible pressure sensor is designed for installation in the base vault of an elevated tank or reservoir or in the dry well of a lift station.

The SLX 110 is identical in design and options to the SLX 100 with the addition of a 2" PVC socket fitting for solvent welding a reducing bushing or PVC piping. Refer to the SLX 100 sales literature for specifications and ordering information.

Reducer bushings are available to adapt from 2" slip to 1-1/2", 1", 3/4" and 1/2" F P T (female pipe thread).

The SLX 100 may be welded to 2" pipe for mounting to a flange.